

# KBZ®

www.folangsiforklift.com

## COUNTERBALANCE ELECTRIC STACKER 平衡重式电动堆垛车

KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ®

### CDD06-LC 窄腿

AC 600Kg (起升高度: 1400-3300mm)

#### CONFIGURATION AND PERFORMANCE

- ▶ Short wheelbase and more flexible.
- ▶ Electronic power steering system, light and low noise.
- ▶ Two-way magnetic valve, three drop speed mode.
- ▶ AC Driving system, No carbon brush, maintenance free.
- ▶ USA CURTIS driving controller.
- ▶ Electromagnetic, regenerative braking system.
- ▶ Automatic lifting limit, proximity switch, long life.

#### SAFETY

- ▶ Curve automatic deceleration devices, more safe.
- ▶ Goods high position, vehicle automatic deceleration.
- ▶ Stepless speed control system, safe and quiet.
- ▶ Controller with Multiple automatic protection.
- ▶ Emergency reversing device/Emergency brake switch.

#### 配置和性能

- ▶ 短轴距, 更灵活。
- ▶ 电子助力转向, 轻便、静音;
- ▶ 双路电磁阀, 三中下降速度模式;
- ▶ 交流驱动, 无碳刷、免维修;
- ▶ 美国 CURTIS 驱动控制器;
- ▶ 电磁、再生制动系统;
- ▶ 起升自动限位, 长寿命接近开关。

#### 安全

- ▶ 弯道自动减速装置, 更安全;
- ▶ 货叉高货位, 车辆行驶自动减速;
- ▶ 驱动无级调速, 安全、静音;
- ▶ 控制器多重自动保护系统;
- ▶ 紧急反向装置 / 紧急制动开关。



Electric Pallet Truck Expert

# KBZ®

www.folangsiforklift.com

## COUNTERBALANCE ELECTRIC STACKER 平衡重式电动堆垛车


KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ®

### SPECIFICATION


详细说明

		Unit	
Feature 特性	Model 型号		CDD06-LC
	Configuration No. 配置号		970
	Type 类型		Counterbalanced
	Mast type 门架类型		2-Stage STD
	Load capacity 额定载重	kg	600
	Load center 载荷中心距	mm	500
	Wheel base 轴距	mm	794
Wheels	Operating type 操作类型		Walkie/Stand On
	Wheels type 车轮类型(前/后)		PU
Dimension 尺寸	Wheel quantity Driving wheel/Balance wheel/Bearing wheel 驱动轮/平衡轮/承重轮数量		1/0/2
	Standard lift height 标准门架起升高度	mm	1400/2000/2500/3000/3300
	Max extend height 门架作业时整车最大高度	mm	2400/3000/3500/4000/4300
	Mast lowered height 门架缩回时整车静态高度	mm	1230/1580/1780/2030/2130
	Lowered fork height 货叉最低高度	mm	55
	Fork size (Length/width/thickness) 标准货叉规格 (长/宽/厚)	mm	1070/100/40
	Overall length 整车全长 踏板收起/放下	mm	2120
	Overall width 车体宽度	mm	1015
	Outside width between forks 货叉外侧间隙	mm	200-660
	Inside width between forks 货叉内侧间隙	mm	0-460
	Min. Turning radius 最小转弯半径 踏板收起/放下	mm	971
Performance	Min. Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度	mm	2346/2822
	Min. Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度	mm	2379/2844
	Min. ground clearance 最小离地间隙	mm	80
	Travel speed, laden/unladen 最大行驶速度 满载/空载	km/h	5/5.5
	Lift speed, laden/unladen 最大起升速度 满载/空载	mm/s	130/230
Electrical configuration	Travel speed, laden/unladen 最大下降速度 满载/空载	mm/s	130/230
	Gradeability, laden/unladen 爬坡速度 满载/空载	%	5/7
	Drive motor 驱动电机	KW	AC1.5
	Lift motor 起升电机	KW	DC3
Weight	Steering motor 转向电机	KW	DC0.15
	Battery voltage/capacity 蓄电池电压/容量	V/Ah	24/270
	Brake 制动		Electromagnetic/Regenerative
	Controller 控制器型号		CURTIS
	Battery weight 蓄电池重量	kg	245
	Service weight with battery 自重(包含蓄电池)	kg	1770

#### DIMENSION DRAWING 外形尺寸图

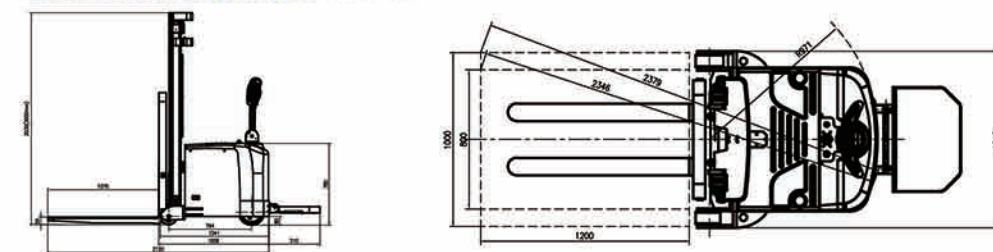

#### 载荷曲线图 LOAD CURVE

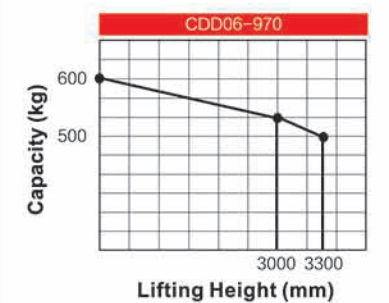

FOLANGSI MACHINE CO., LTD.

Tel.: 020-39993595 Fax: 020-39993597

E-mail: admin@folangsiforklift.com

# KBZ®