

KBZ®

www.folangsiforklift.com

ELECTRIC STACKER 电动托盘堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

CDD12-LX

AC 1200Kg (Lift Height : 2000-3600mm)

- ▶ Mechanical Steering- Economic, comfortable, more reliable.
- ▶ AC Driving System- Low noise, quiet, without carbon brush and free maintenance.
- ▶ Electric Lifting- Rapid, efficient, electricity limit switch is STD.
- ▶ Energy conservation- Save energy, every day only 5KWh.
- ▶ AC Controller- Stepless, strong power, multiple automatic protection.
- ▶ Intelligent Control- Regenerative braking, automatic energy recovery.

- ▶ 机械转向 - 舒适、经济、更可靠；
- ▶ 交流驱动 - 低噪、静音，无碳刷、免维护；
- ▶ 电起升 - 快速、高效，标配起升限位装置；
- ▶ 节能 - 低能效，每天仅需5度电；
- ▶ 交流控制器 - 无级调速、动力强劲、多重自动保护；
- ▶ 智能控制 - 再生制动、能量自动回收。



Electric Pallet Truck Expert

KBZ®

www.folangsiforklift.com

ELECTRIC STACKER 电动托盘堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ


SPECIFICATION

详细说明


	Unit	
Feature 特性	Model 型号	CDD12-LX
	Configuration No. 配置号	060
	Type 类型	
	Mast type 门架类型	2-Stage STD
	Load capacity 额定载重	kg 1200
	Load center 载荷中心距	mm 600
	Wheel base 轴距	mm 1285
Wheels	Operating type 操作类型	Walkie
	Wheels type 车轮类型(前/后)	PU
Dimension 尺寸	Wheel quantity 驱动轮/平衡轮/承重轮数量	1/1/4
	Standard lift height 标准门架起升高度	mm 2000/2500/3000/3300/3600
	Lowered fork height 货叉最低高度	mm 90
	Fork size (Length/width/thickness) 标准货叉规格 (长/宽/厚)	mm 1150(1220)/185/55
	Overall length 整车全长 踏板收起/放下	mm 1898
	Overall width 车体宽度	mm 806
	Max extend height 门架作业时整车最大高度	mm 2385/2885/3385/3685/3985
	Mast lowered height 门架缩回时整车静态高度	mm 1550/1800/2050/2200/2350
	Min. Turning radius 最小转弯半径 踏板收起/放下	mm 1475
	Min. Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度	mm 2045
	Min. Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度	mm 2084
Performance	Min. ground clearance 最小离地间隙	mm 30
	Travel speed, laden/unladen 最大行驶速度 满载/空载	km/h 3.5/4
	Lift speed, laden/unladen 最大起升速度 满载/空载	mm/s 130/230
	Travel speed, laden/unladen 最大下降速度 满载/空载	mm/s 130/230
Electrical configuration	Gradeability, laden/unladen 爬坡速度 满载/空载	% 5/7
	Drive motor 驱动电机	kw AC0.95
	Lift motor/Steering motor 起升电机 转向电机	kw DC2.5
Weight	Battery voltage/capacity 蓄电池电压/容量	V/Ah 24/210
	Brake 制动	Electromagnetic/Regenerative
	Controller 控制器型号	CURTIS
	Battery weight 蓄电池重量	kg 190
	Service weight with battery 自重(包含蓄电池)	kg 1010

DIMENSION DRAWING

外形尺寸图

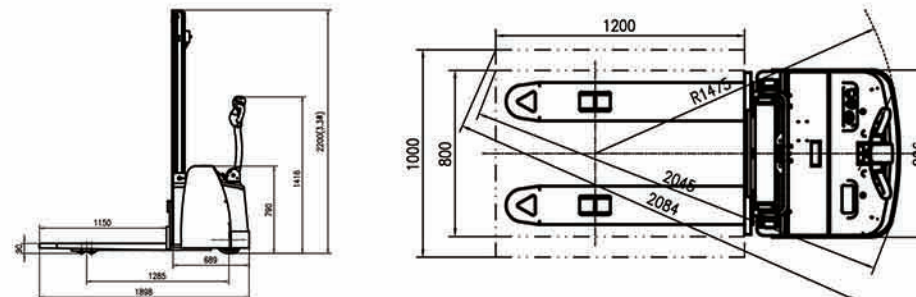

LOAD CURVE

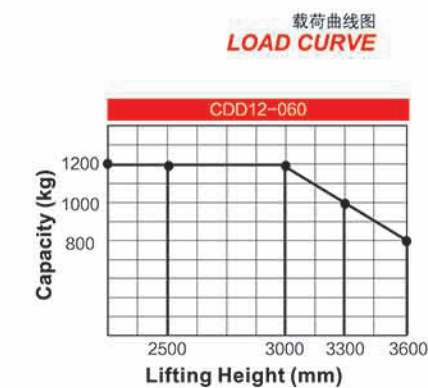

FOLANGSI MACHINE CO., LTD.

Tel.: 020-39993595 Fax: 020-39993597

E-mail: admin@folangsiforklift.com

KBZ®